


# TITAN CAST

**MADE IN BRITAIN**

IK10 IP65



Heavy Duty Bulkhead

## Features

- IP65 ingress protection
- IK10 vandal resistance
- Die cast aluminium base
- Hinged gear tray for easy maintenance
- UK manufactured silicone gasket
- High performance Lumaax TM Diffuser
- Tridonic LED board and driver
- Manufactured in the UK
- 3 x conduit entry points
- 50,000 life hours
- WAGO plug terminal blocks for easy maintenance
- Safety approved by the Lighting Industry association





**TRIDONIC**  
enlightening your ideas

**MADE IN BRITAIN**

*Lumaax*™

IP65

IK10

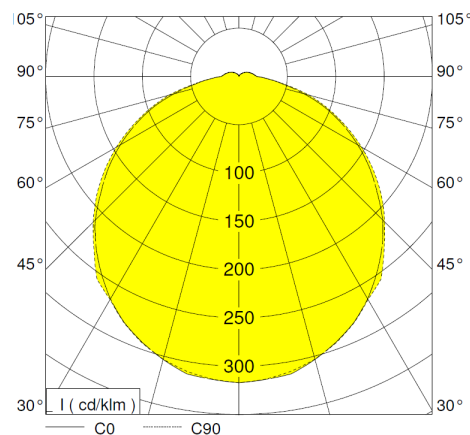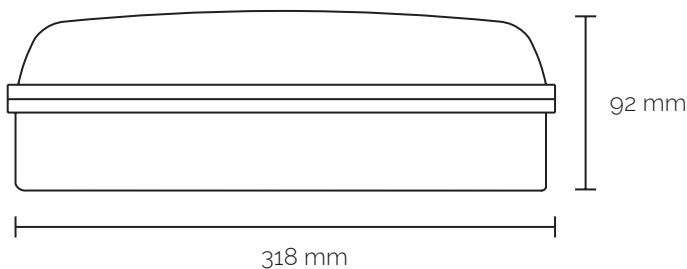

## Additional Hood Bezel

**MADE IN BRITAIN**

The additional Hood Bezel reduces undesirable light pollution, making it ideal for the outside of buildings and other exterior applications. The Hood is manufactured here in the UK, and securely fixes to the Diffuser and Base.

- Die Cast Aluminium.
- Available in Black, White and Aluminium as standard. Bespoke colours are available if a RAL number is provided.

## Options

Please note: 'HE' = High Efficiency 'HO' = High Output

| Specification     | mA  | Colour Temp | Watts (w) | Lumens (Lm) | CRI | EM Lm | Luminaire Efficiency |
|-------------------|-----|-------------|-----------|-------------|-----|-------|----------------------|
| Mains Dali HE     | 350 | 3000k       | 9w        | 1,000 lm    | 80  |       | 107 Lumlm/circW      |
| Mains Dali HE     | 350 | 4000k       | 9w        | 1,112 lm    | 80  |       | 119.5 Lumlm/circW    |
| Mains Dali HO     | 500 | 3000k       | 13w       | 1,367 lm    | 80  |       | 98 Lumlm/circW       |
| Mains Dali HO     | 500 | 4000k       | 13w       | 1465 lm     | 80  |       | 105 Lumlm/circW      |
| Emergency HE      | 350 | 3000k       | 9w        | 1,000 lm    | 80  | 103   | 107 Lumlm/circW      |
| Emergency HE      | 350 | 4000k       | 9w        | 1,112 lm    | 80  | 114   | 119.5 Lumlm/circW    |
| Emergency HO      | 500 | 3000k       | 13w       | 1,367 lm    | 80  | 103   | 98 Lumlm/circW       |
| Emergency HO      | 500 | 4000k       | 13w       | 1465 lm     | 80  | 114   | 105 Lumlm/circW      |
| Emergency Dali HE | 350 | 3000k       | 9w        | 1,000 lm    | 80  | 103   | 107 Lumlm/circW      |
| Emergency Dali HE | 350 | 4000k       | 9w        | 1,112 lm    | 80  | 114   | 119.5 Lumlm/circW    |
| Emergency Dali HO | 500 | 3000k       | 13w       | 1,367 lm    | 80  | 103   | 98 Lumlm/circW       |
| Emergency Dali HO | 500 | 4000k       | 13w       | 1465 lm     | 80  | 114   | 105 Lumlm/circW      |

## Part Code Guide

When placing orders please use the below part code format, EG: **T (TITAN)/M/B/350/4000/AT/HB/**

Please note: The Titan comes with a Lumaax diffuser as standard. If requesting a bespoke colour, please specify the RAL number on the part code.

| 1) Options                     | 2) Colour                    | 3) Performance                | 5) Colour Temp      |
|--------------------------------|------------------------------|-------------------------------|---------------------|
| <b>M</b> - Mains Dali          | <b>B</b> - Black             | <b>350</b> - 350 mA (**** lm) | <b>3000</b> - 3000k |
| <b>EM</b> - Emergency          | <b>W</b> - White             | <b>500</b> - 500 mA (**** lm) | <b>4000</b> - 4000k |
| <b>ED</b> - Emergency Dali     | <b>A</b> - Aluminium         |                               |                     |
| <b>SE</b> - Sensor On/Off      | <b>BS-RAL XXXX</b> - Bespoke |                               |                     |
| <b>SD</b> - Sensor On/Off Dali |                              |                               |                     |

—————→ Continued —————→

| 6) Screws               | 10) Hood Bezel        |
|-------------------------|-----------------------|
| <b>SS</b> - Standard    | <b>HB</b> - Black     |
| <b>AT</b> - Anti Tamper | <b>HA</b> - Aluminium |
|                         |                       |