



## CONTINULUX® THE AFFORDABLE CONTINUOUS LED LIGHTING



<b>Module Dimensions: 42.4mm slotted tube</b>	300mm x 24mm x 24mm
<b>Module Dimensions: 48.3mm slotted tube</b>	300mm x 27mm x 30mm
<b>Operating Voltage:</b>	Stabilised 24V DC $\pm$ 5%
<b>Operating Current:</b>	4.8 Watt Luminous Efficacy (lm/W) 115.6
<b>Emergency Operating Current:</b>	0.29 Watt Luminous Efficacy (lm/W) 100
<b>Colour Temperature:</b>	3000K, 4000K, Other options on request
<b>Light Flow:</b>	Asymmetric or Symmetric
<b>Cast Lens Material: Clear or Diffused</b>	Polycarbonate Antimicrobial Lumaax Lens
<b>Installation:</b>	Mechanical Fixing
<b>Colour Rendering:</b>	CRI (Ra) 83.5
<b>Temperature Performance:</b>	29.1 @ 25°C (°C)
<b>Module Qty per Driver</b>	30 +
<b>Reverse Battery Protection:</b>	Yes
<b>Luminous Emittance:</b>	10 – 150 LUX @ FFL +
<b>Emergency Luminous Emittance:</b>	10 Lu






[www.footfallighting.com](http://www.footfallighting.com)



[linda@footfallighting.co.uk](mailto:linda@footfallighting.co.uk)

FEATURES:

*Continuous rail of light: Asymmetric or Symmetric  
Radius profile module to round handrail circumference  
Modules sit back to back for a continuous line of light  
Vandal Resistant  
Lux Variable  
Multi-Resonance  
Easy Maintenance  
Dedicated Emergency LED's; 3 Hour Duration  
Quick & Simple Module Replacement  
Each module an individual light source  
Constant Voltage; if a failure of one module it will not affect the other lights in the rail.  
Supplied with Bespoke Handrail Brackets  
Fabrication of Handrails to UKAS 9001-2015  
Manufactured and Fitted by our own engineers  
Every module tested in the factory prior to despatch  
50,000 Hours : 5 year warranty*

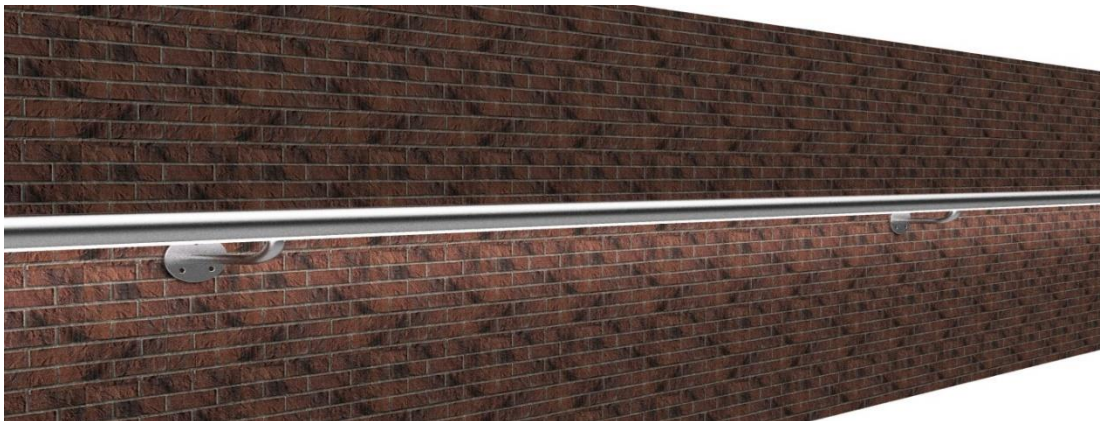

[www.footfallighting.com](http://www.footfallighting.com)



[linda@footfallighting.co.uk](mailto:linda@footfallighting.co.uk)

For more information on the complete range of Footfall LED Lighting products please contact:

John Haynes or Linda Frost on 07500 336861

